


MAINFRAME SYSTEMS

- > Compact and flexible configuration
- > Convenient for mobile applications
- > Powerful PC inside for fast online displays and analysis

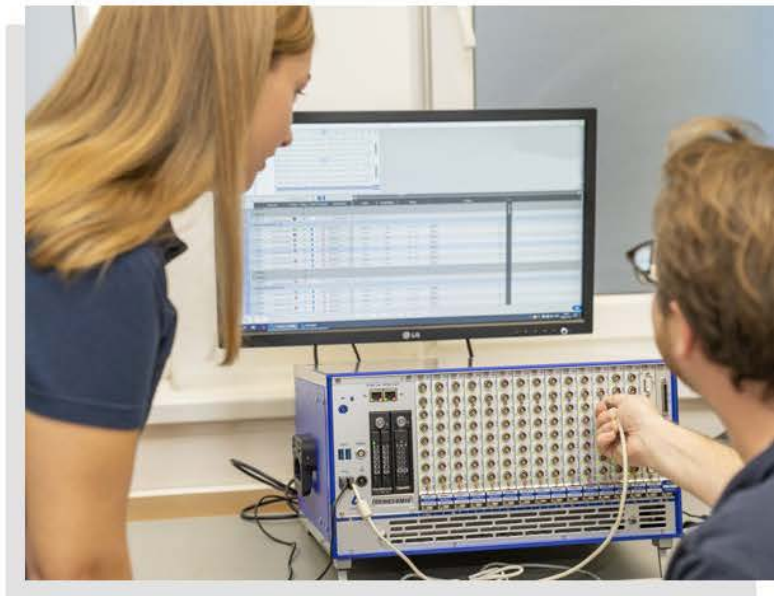

	DEWE3-M4	DEWE3-M8s	DEWE2-M18
Slots for TRION / TRION3 modules	4 TRION / TRION3	8 TRION / TRION3	18 TRION
High-speed channel expansion	Add TRIONet3 or OXYGEN-NET		
Low-speed channel expansion	XR modules		
Data storage	1 TB SSD dedicated for data storage 512 GB SSD for operating system and application software	1 TB SSD dedicated for data storage 512 GB SSD for operating system and application software	256 GB Solid State Disk
Optional data storage	Up to 2 TB	Up to 2 TB	Up to 1 TB
Gapless storing rate	Typ. 400 MB/s	Typ. 800 MB/s	Typ. 90 MB/s
POWER SUPPLY			
Input voltage (max.)	10 to 36 V _{DC} isolated; incl. external AC power supply	10 to 36 V _{DC} isolated; incl. external AC power supply, optional battery powered; 2 separate power inputs for mutual power supply backup	90 to 264 V _{AC}
Option 1	(DW2-PS-DC-Buffer) Internal buffer battery for ~5 min. operation	n/a	n/a
Option 2	(DW2-UPS-250-DC) External battery pack, 3 battery slots	n/a	n/a
DIMENSIONS			
Dimensions (W x D x H) without handle/feet	318 x 253 x 108 mm (12.5 x 10 x 4.3 in.)	339 x 281 x 239 mm [4 u] (13.3 x 11.1 x 9.4 in.)	441 x 427 x 177 mm [4 u] (17.4 x 16.8 x 7 in.)
Weight without modules and batteries ¹⁾	Typ. 3.9 kg (8.6 lb.)	Typ. 9.1 kg (20.06 lb.)	Typ. 13 kg (28.6 lb.)

¹⁾ Weight of one battery: 540 g (1.20 lb.)

OPTIONS AND ACCESSORIES



Box for connecting up to 4 GigE cameras, with integrated power supply
[CAM-GIGE-SPLIT-01-BOX]



Desktop battery charger for 4 batteries
[BAT-CHARGER-4]



19" mounting kit available